

## P1 type floor-standing - R410A

The compact floor-standing P1 units are the ideal solution for providing perimeter air conditioning.



+ COMPATIBLE WITH ALL PANASONIC CONNECTIVITY SOLUTIONS. FOR DETAILED INFORMATION GO TO THE CONTROL SYSTEMS SECTION

Indoor unit			S-22MP1E5	S-28MP1E5	S-36MP1E5	S-45MP1E5	S-56MP1E5	S-71MP1E5
Cooling capacity	kW		2,2	2,8	3,6	4,5	5,6	7,1
Input power	W		56,00	56,00	85,00	126,00	126,00	160,00
Current	A		0,25	0,25	0,38	0,56	0,56	0,72
Heating capacity	kW		2,5	3,2	4,2	5,0	6,3	8,0
Input power	W		40,00	40,00	70,00	91,00	91,00	120,00
Current	A		0,18	0,18	0,31	0,41	0,41	0,54
Fan type			Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan
Air flow	Hi/Med/Lo	m <sup>3</sup> /min	7,0/6,0/5,0	7,0/6,0/5,0	9,0/7,0/6,0	12,0/9,0/8,0	15,0/13,0/11,0	17,0/14,0/12,0
External static pressure		Pa	15	15	15	15	15	15
Sound pressure	Hi/Med/Lo	dB(A)	33/30/28	33/30/28	39/35/29	38/35/31	39/36/31	41/38/35
Dimension	HxWxD	mm	615x1065x230	615x1065x230	615x1065x230	615x1380x230	615x1380x230	615x1380x230
Net weight		kg	29	29	29	39	39	39
Piping diameter	Liquid	Inch (mm)	1/4(6,35)	1/4(6,35)	1/4(6,35)	1/4(6,35)	1/4(6,35)	3/8(9,52)
	Gas	Inch (mm)	1/2(12,70)	1/2(12,70)	1/2(12,70)	1/2(12,70)	1/2(12,70)	5/8(15,88)

### Accessories

<b>CZ-RTC6W</b>	CONEX wired remote controller (non-wireless), white
<b>CZ-RTC6WBL</b>	CONEX wired remote controller with Bluetooth®, white
<b>CZ-RTC6</b>	CONEX wired remote controller (non-wireless), black
<b>CZ-RTC6BL</b>	CONEX wired remote controller with Bluetooth®, black
<b>CZ-RTC5B</b>	Wired remote controller with Econavi function


### Accessories

<b>CZ-RWS3 + CZ-RWRC3</b>	Infrared remote controller and receiver
<b>PAW-RE2C4-MOD-WH</b>	Room controller for hotel rooms, white
<b>PAW-RE2C4-MOD-BK</b>	Room controller for hotel rooms, black
<b>PAW-RE2D4-WH</b>	Display control for hotel rooms, white
<b>PAW-RE2D4-BK</b>	Display control for hotel rooms, black

### Technical focus

- Pipes can be connected to either side of the unit from the bottom or rear
- Easy to install
- Front panel opens fully for easy maintenance
- Removable air discharge grille gives flexible airflow
- Room for condensate pump

### Effective perimeter handling

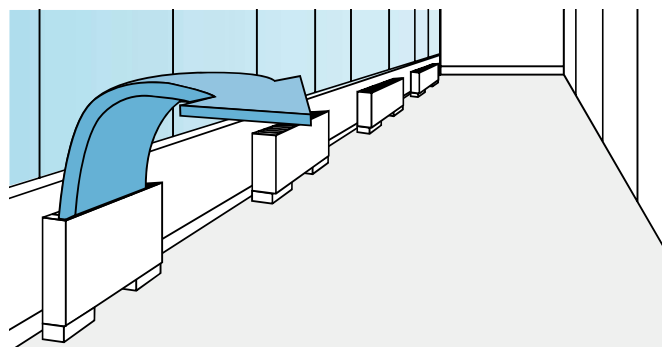

INTERNET CONTROL: Optional.

Rating conditions: Cooling indoor 27 °C DB / 19 °C WB, Cooling outdoor 35 °C DB / 24 °C WB, Heating indoor 20 °C DB, Heating outdoor 7 °C DB / 6 °C WB, (DB: Dry Bulb; WB: Wet Bulb). Specifications subject to change without notice. For detailed information about ErP / Energy Labelling, please visit our websites [www.aircon.panasonic.eu](http://www.aircon.panasonic.eu) or [www.ptc.panasonic.eu](http://www.ptc.panasonic.eu).