

P1 Type Floor Standing



The compact Floor Standing P1 units are the ideal solution for providing perimeter air conditioning

The standard wired controller can be incorporated into the body of the unit.

Technical focus

- Pipes can be connected to either side of the unit from the bottom or rear
- Easy to install
- Front panel opens fully for easy maintenance
- Removable air discharge grille gives flexible airflow
- Room for condensate pump
- For build-in remote control, only CZ-RTC2 is suitable



PAW-RE2C4
Optional Controller.
Control for hotel application.



CZ-RTC5B
Optional Controller.
Wired remote controller.
Compatible with Econavi.



CZ-RTC2
Optional Controller.
Timer remote controller.
For Floor Standing (P1) indoor units.




CZ-RWS3 + CZ-RWRC3
Optional Controller.
Infrared remote controller.



CZ-RE2C2
Optional Controller.
Simplified wired remote controller.

| Model | | S-22MP1E5 | S-28MP1E5 | S-36MP1E5 | S-45MP1E5 | S-56MP1E5 | S-71MP1E5 |
|---------------------------|-----------------------------------|----------------------|------------------|------------------|------------------|-------------------|-------------------|
| Cooling capacity | kW | 2,20 | 2,80 | 3,60 | 4,50 | 5,60 | 7,10 |
| Input power cooling | W | 56,00 | 56,00 | 85,00 | 126,00 | 126,00 | 160,00 |
| Operating current cooling | A | 0,25 | 0,25 | 0,38 | 0,56 | 0,56 | 0,72 |
| Heating capacity | kW | 2,50 | 3,20 | 4,20 | 5,00 | 6,30 | 8,00 |
| Input power heating | W | 40,00 | 40,00 | 70,00 | 91,00 | 91,00 | 120,00 |
| Operating current heating | A | 0,18 | 0,18 | 0,31 | 0,41 | 0,41 | 0,54 |
| Fan type | | Sirocco fan | Sirocco fan | Sirocco fan | Sirocco fan | Sirocco fan | Sirocco fan |
| Air volume | Hi / Med / Lo m ³ /min | 7,00/6,00/5,00 | 7,00/6,00/5,00 | 9,00/7,00/6,00 | 12,00/9,00/8,00 | 15,00/13,00/11,00 | 17,00/14,00/12,00 |
| External static pressure | Pa | 15 | 15 | 15 | 15 | 15 | 15 |
| Sound pressure | Hi / Med / Lo dB(A) | 33/30/28 | 33/30/28 | 39/35/29 | 38/35/31 | 39/36/31 | 41/38/35 |
| Dimensions | H x W x D mm | 615 x 1065 x 230 | 615 x 1065 x 230 | 615 x 1065 x 230 | 615 x 1380 x 230 | 615 x 1380 x 230 | 615 x 1380 x 230 |
| Net weight | kg | 29 | 29 | 29 | 39 | 39 | 39 |
| Piping connections | Liquid pipe | Inch (mm) 1/4(6,35) | 1/4(6,35) | 1/4(6,35) | 1/4(6,35) | 1/4(6,35) | 3/8(9,52) |
| | Gas pipe | Inch (mm) 1/2(12,70) | 1/2(12,70) | 1/2(12,70) | 1/2(12,70) | 1/2(12,70) | 5/8(15,88) |

Effective perimeter handling

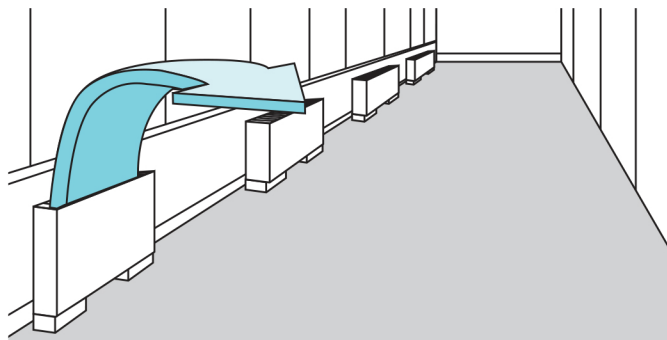

Effective perimeter handling

