

# INVERTER HI-WALL

## COASTALPLUS



**R32**  
REFRIGERANT



Golden and Green Fin\*



Ionizer Filter



Quiet Mode


\*sizes 9 & 12





**The best solution  
for coastal and industrial  
applications**

# INVERTER HI-WALL COASTALPLUS

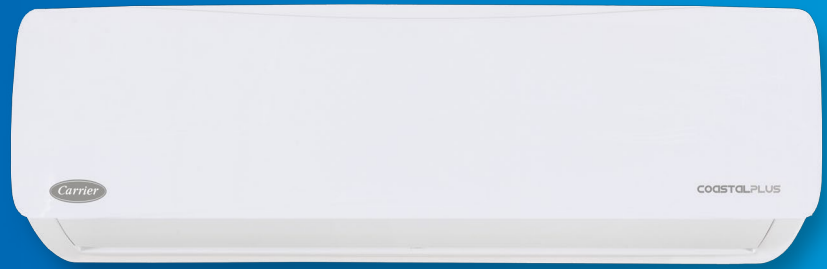

It's Gold plating fin heat exchanger - Corrosion protection, offering special anti-corrosion coating of the heat exchanger and protecting from atmospheric phenomena and effects of aggressive environment.

## FEATURES

- |   |                                      |   |                                  |
|---|--------------------------------------|---|----------------------------------|
|  | Wi-Fi Active                         |  | Timer                            |
|  | Golden Fin                           |  | Dry Mode                         |
|  | Green Fin                            |  | Quiet Mode                       |
|  | Remote Control Bright Screen         |  | Self Clean                       |
|  | Cold Catalyst Filter                 |  | Auto Diagnosis & Self Protection |
|  | Vitamin C Filter                     |  | Auto Defrosting                  |
|  | Negative Ion Filter (Ionizer Filter) |  | Auto Restart                     |
|  | Follow Me                            |  | Electrical Voltage Protection    |
|  | Sleep Mode                           |  | Low Ambient                      |
|  | ECO                                  |  | Memorize                         |
|  | Turbo                                |  | Remote Control Locking           |
|  | Louver Function/ Horizontally        |  | Refrigerant Leakage Detection    |
|   |                                      |  | 1W Stand By                      |

# TECHNICAL CHARACTERISTICS

SYSTEM		38QHB/42QHB09D8SC	42QHB/38QHB12D8SC	42QHB/38QHB18D8SC	42QHB/38QHB24D8SC
<b>Cooling capacity</b>	<b>kW</b>	<b>2.64 (1.0-3.2)</b>	<b>3.52 (1.0-4.1)</b>	<b>5.28 (1.8-6.1)</b>	<b>7.04 (2.6-8.4)</b>
	BTU/h	9.012 (3.414 - 13.990)	12.017 ( 3.414 - 13.998)	18.025 (6.141 - 20.815)	24.035 (8.870 - 28.660)
<b>Heating capacity</b>	<b>kW</b>	<b>2.80 (0.9-3.6)</b>	<b>3.80 (0.9-4.7)</b>	<b>5.50 (1.4-6.8)</b>	<b>7.60 (1.5-9.4)</b>
	BTU/h	9.560 (3.070 - 12.285)	12.975 (3.070 - 16.036)	18.777 (4.780 - 23.200)	25.950 (5.120 - 32.073)
Heating capacity at -7°C	kW	2,9	3,0	3,7	6,3
Heating capacity at -15°C	kW	2,3	2,4	3,1	5,7
Heating capacity at -20°C	kW	2,0	2,0	2,7	4,9
Temp range cooling	°C	-15-46	-15-46	-15-46	-15-46
Temp range heating	°C	-15-24	-15-24	-15-24	-15-24
SEER / SCOP (warmer) / SCOP (average) / SCOP (cold)	W/W	7.1 / 5.1 / 4.0	6.8 / 5.1 / 4.0	6.4 / 5.1 / 4.0	6.4 / 5.1 / 4.0
Energy label		A++ / A+++ / A+	A++ / A+++ / A+	A++ / A+++ / A+	A++ / A+++ / A+
Yearly energy consumption	kWh	130 / 824 / 875	181 / 851 / 945	289 / 1400 / 1365	385 / 1730 / 1785
Standard current (cooling)	A	3,30	5,30	7,30	10,30
Standard input (cooling)	W	740	1200	1630	2320
Standard current (heating)	A	3,20	4,80	6,60	9,70
Standard input (heating)	W	720	1100	1480	2200
Refrigerant amount	kg	0,70	0,80	1,25	1,60
Liquid side / Gas side		1/4" - 3/8"	1/4" - 3/8"	1/4" - 1/2"	3/8" - 5/8"
Standard piping length	m	5	5	5	5
Min piping length	m	3	3	3	3
Max piping length	m	25	25	30	40
Max difference	m	10	10	20	20
Additional charge	g/m	12	12	12	24
Voltage, Hz		220-240V-, 50/60Hz, 1Ph	220-240V-, 50/60Hz, 1Ph	220-240V-, 50/60Hz, 1Ph	220-240V-, 50/60Hz, 1Ph
<b>INDOOR UNIT</b>		<b>42QHB09D8SC</b>	<b>42QHB12D8SC</b>	<b>42QHB18D8SC</b>	<b>42QHB24D8SC</b>
Sound power level	dB(A)	55	57	60	63
Sound pressure level (Max. - Min.)	dB(A)	38/31/23/20	39/32/23/21	42/33/27/21	46/40/30/26
Air flow (Max. - Min.)	m <sup>3</sup> /h	420/310/230/150	530/470/290/170	750/510/420/330	1050/750/560/450
Weight	kg	7.3	8.2	10.8	12.9
Dimensions (WxDxH)	mm	722×187×290	802×189×297	965×215×319	1080×226×335
<b>OUTDOOR UNIT</b>		<b>38QHB09D8SC</b>	<b>38QHB12D8SC</b>	<b>38QHB18D8SC</b>	<b>38QHB24D8SC</b>
Sound power level	dB(A)	61	62	65	68
Sound pressure level	dB(A)	56	56	57	59
Air flow	m <sup>3</sup> /h	1900	1900	2100	2700
Weight		27.0	27.0	37.0	50.0
Dimensions (WxDxH)		770×300×555	770×300×555	800×333×554	845×363×702

Notes:  
 • Sound data @ cooling mode  
 • -7°C/-15°C/-20°C heating @ free frequency

\* Preliminary Data



Turn to the experts